




Product Profile for Gas Service



244 Redi-Clamp

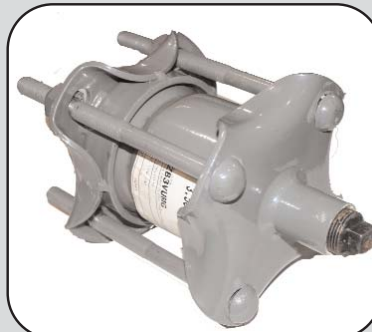


EZB Line Cap




EZ Restraint Coupling



245 Redi-Clamp

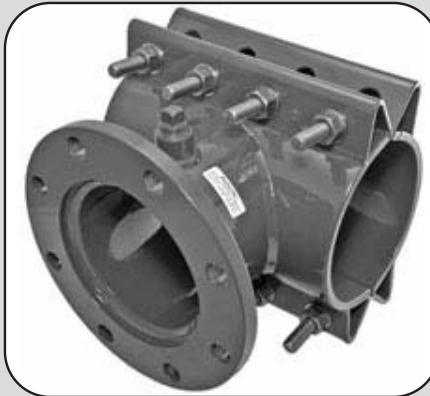

632 Tapping Sleeve

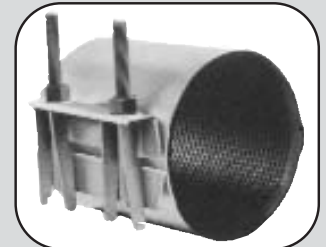

266 All-Stainless
Full Circle Repair Clamp



225 Full Circle Repair Clamp












274 Bell Joint Clamp



354 Heavy Duty Saddle




Standard-Seal Only Couplings

Product	Product Type	Pipe Sizes	Lengths	Gaskets	Finish
 E Series	IPS Steel Pipe	1/2" and up IPS	5", 7", 12", 16" and 24" standard	Plain or conductive	Shop coat or epoxy
 E Series	Insulating IPS Steel Pipe	3/4" thru 48" IPS	5", 7" and 16" standard	One insulating, one conductive	Shop coat or epoxy
 E Series	Cast Iron	2.50" thru 48" OD*	5", 12" and 16"	Plain	Shop coat or epoxy
 E Series	Reducing, IPS, Steel Pipe	2" to 1 1/4" and up	7" and 10"	Plain or conductive	Shop coat or epoxy
 E Series	Insulating, Reducing, IPS Steel Pipe	2" to 1 1/4" and up	7" and 10"	One insulating, one conductive	Shop coat or epoxy
 E Series	Reducing, CI to IPS Steel Pipe	2.5" CI to 2" IPS and up	7", 12" and 16" standard	One insulating, one conductive	Shop coat or epoxy
 EB Series	Vented Line Cap, IPS Steel Pipe	1 1/4" and up	5" standard	Plain or conductive	Shop coat or epoxy
 EB Series	Vented Line Cap, Cast Iron	2.50" and up	7" standard	Insulating from pipe, conductive from cap	Shop coat or epoxy
 E-UFA Series	Standard, Seal Only - Flanged Adapters**	2" and up	12" standard	Conductive	Shop coat or epoxy

*Larger sizes available









**150# and 300# Flange mating

Rod & Lug Harness Device for Steel Pipe	
	<p>Light Duty: 3/4" x 18", 24", 30" or 38" Heavy Duty: 7/8" X 24", 30" or 44" Finish: Shop coat epoxy Lugs/Bushings: Conductive both ends or insulating one end.</p> <p><i>Lugs & Bushings also available seperately.</i></p>


Special Note
<p>The couplings on this page do not restrain the pipe. If pipe pull-out is a possibility, use the Rod and Lug Harness Device.</p> <p>The Maxi-Grip Couplings have seal and restraint capabilities.</p>




Maxi-Grip EZ Series

Product	Product Type	Pipe Sizes	Lengths	Gaskets	Finish
 EZ Series	Class I Seal and Restraint, IPS Pipe	1" thru 12" IPS	7"	Conductive	Epoxy Coated
 EZ Series	Class I Seal and Restraint, Insulating, IPS Pipe	2" thru 6" IPS	7"	One insulating, one conductive	Epoxy Coated
 EZ Series	Class II Seal and Restraint, IPS Reducing	2" to 1 1/4" thru 12" to 10" IPS	7" or 12"	Conductive	Epoxy Coated
 EZ Series	Class II Seal and Restraint, Insulating, Reducing	2" to 1 1/4" thru 6" to 4" IPS	7"	One insulating, one conductive	Epoxy Coated
 EZ Series	Class III Seal and Restraint Insulating, CI to IPS Reducing	2.5" CI to 1 1/4" IPS thru 9.05 CI to 8" IPS	7"	One insulating, one conductive	Epoxy Coated
 EZB Series	Seal and Restraint, Vented Line Cap (for steel pipe)	2" thru 12" IPS	7"	Conductive	Epoxy Coated
 EZB Series	Seal and Restraint, Insulating, Vented Line Cap (for cast iron pipe)*	2.50" thru 9.05" OD	7"	Insulating from pipe, conductive to cap	Epoxy Coated
 EZ-UFA Series	Seal and Restraint, Flanged Adapters	2" thru 12" IPS	7"	Conductive	Epoxy Coated














*9.05 thru 9.30 OD available in U-Series.

Stiffeners	
	<p>Metal inserts for P.E. and PVC pipe.</p> <p>Pipe Sizes: 1/2" and up Lengths: 8" and 10"</p>

Transition Fitting	
	<p>For steel and P.E. pipe.</p> <p>Pipe Sizes: 10-20" IPS Lengths: varies by size Ends: Weld, threaded</p> <p>Gaskets: Buna N-O Rings Finish: Epoxy coated **special sizes developed upon request.</p>



Clamps & Service Saddles

Product	Product Type	Pipe Sizes	Widths	Gaskets
 225*⌘	Full Circle Clamp	2" thru 12" standard	7 1/2" thru 12" standard	Nitrile (Buna N)
 234	Tapped Full Circle Clamp	2" thru 12" standard	7 1/2" thru 12" standard	Nitrile (Buna N)
 266*⌘	Full Circle Clamp	2" thru 12" standard	7 1/2" thru 12" standard	Nitrile (Buna N)
 244 & 247	Full Circle Redi-Clamp	.84" thru 2.38" stan- dard	3", 6" and 12" standard	Nitrile (Buna N)
 245 & 248**	Redi-Clamp	1/2" thru 12" standard	3", 6", 9" and 12" standard	Nitrile (Buna N)
 258	Full Circle, All-Stainless, Cast Lugs	2" thru 12" standard	7 1/2", 15", 22 1/2" standard	Nitrile (Buna N)
 267	High Pressure Full Circle Clamp	4" thru 24" standard	12", 16" and 24" standard	Nitrile (Buna N)
 268	High Pressure Full Circle Clamp	4" thru 24" standard	12 1/2", 15" and 20" standard	Nitrile (Buna N)
 274	Leak Repair Clamp	2" thru 36" standard	-	Nitrile (Buna N)
 312	Single Bale Service Saddle	1" thru 4" standard	-	Nitrile (Buna N)
 314	Double Bale Service Saddle	1" thru 18" standard	-	Nitrile (Buna N)
 354	Heavy Duty Service Saddle Insulated and Conductive	2" thru 12" standard	-	Nitrile (Buna N)
 632	Tapping Sleeves	4" thru 24" standard	-	Nitrile (Buna N)

*Available with tapped outlets.

⌘Larger sizes available upon request.

**248 is only available in 1/2" thru 2" standard.